



» Features

Download

» Drawing

Print

Q&A



» Specification Table » Installation Instructions

Loading

Features

Mounting | Side mount.

mm) increment.


Side Clearance | 3/8" plus 1/64", minus 0 each side. Height | 1-25/64" (35.3 mm).

Loading | 50 pound (22 kgs) class. Size | 12"(300 mm) throuth 26"(650 mm) at 2"(50

Feature | Low profile for shallow drawers, shelves or trays. Metal latch detent in/lock function in extended position for easy drawer removal and industrial cabinet applications.

Option | NJ23002-Metal latch positive stop. NJ21001-Plastic lever for positive stop.

■ Profile



■ Surface Treatment

■ Clear Zinc ■ Black Zinc ■ Black E. Coating ■ White E Coating Stainless Steel ■ Galvanized Steel

Packaging


■ Distribution / 25 pairs per box


*Box QTY might vary with different length, the info provided here is based on 18" (450 mm)

Drawing

■ Product Photo

■ Profile



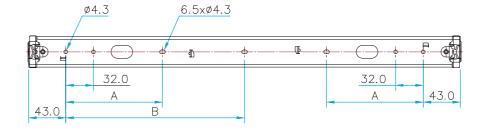


Specification Table

SIZE	SL	TL	Α	В
16" (400mm)	400.0	432.0	112.0	
18" (450mm)	450.0	482.0	112.0	
20" (500mm)	500.0	532.0	112.0	
22" (550mm)	550.0	582.0	112.0	
24" (600mm)	600.0	632.0	112.0	
26" (650mm)	650.0	682.0	112.0	
28" (700mm)	700.0	732.0	144.0	307
30" (750mm)	750.0	782.0	144.0	332
32" (800mm)	800.0	832.0	144.0	357


Installation Instructions

QUICK INSTALLATION GUIDE OF NJ-26104

Two Way Travel Slides, 50 pound (22kgs) loading.

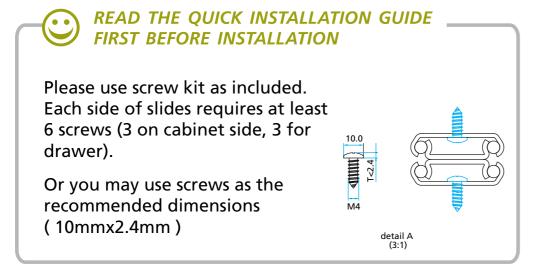

Technical Specification of drawer and cabinets

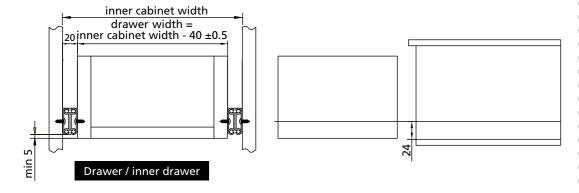


The bottom of drawer slides The center of drawer slides must be 24mm must be 5mm above the above the bottom of cabinet. bottom of drawer to ensure correct function.

Install the drawer slides to the cabinet

To ensure the same length of extension from both sides, center the slide to the depth of the cabinet.

Install the slides to the cabinet with the provided screw kit. Each side requires at least 3 screws.

Please make sure the drawer slide on each side is parallel to each other.



Install the drawer slides to the drawer

Install the slides to the drawer with the provided screw kit.

Each side requires at least 3 screws. Please move the drawer back and forth to see if the drawer runs freely.

If not so, please check if drawer or cabinet is square, the slides are installed in a parallel manner or screws are tightened properly.

